

1700, Setlakwe Street  
 Theftord Mines (QC) G6G 8B2  
 CANADA  
 www.technometalpost.com

**CONFIDENTIAL**

THE INFORMATIONS CONTAINED  
 IN THIS DRAWING IS THE SOLE  
 PROPERTY OF TECHNO PIEUX INC.  
 ANY REPRODUCTION IN PART OR  
 AS A WHOLE WITHOUT THE WRITTEN  
 PERMISSION OF TECHNO METAL POST INC.  
 IS PROHIBITED

REVISIONS

DATE	DESCRIPTION	REV.

Client :

Client adress :

Project :

Drawing : **Techno Metal Post Model P6 (Above ground light structure)**



Approved by :

Date : 2011-10-31

Scale : N/A

Drawing no: P6-G-R0-A-USA

Page number : SHEET 1 OF 1

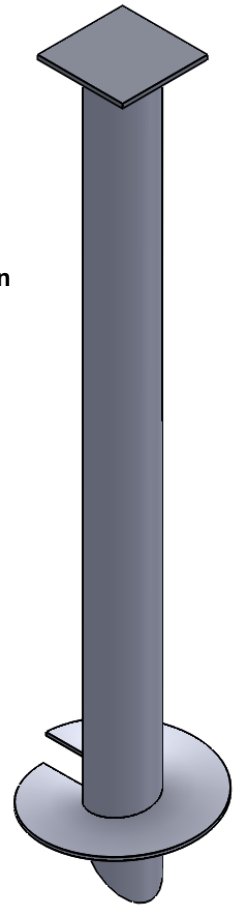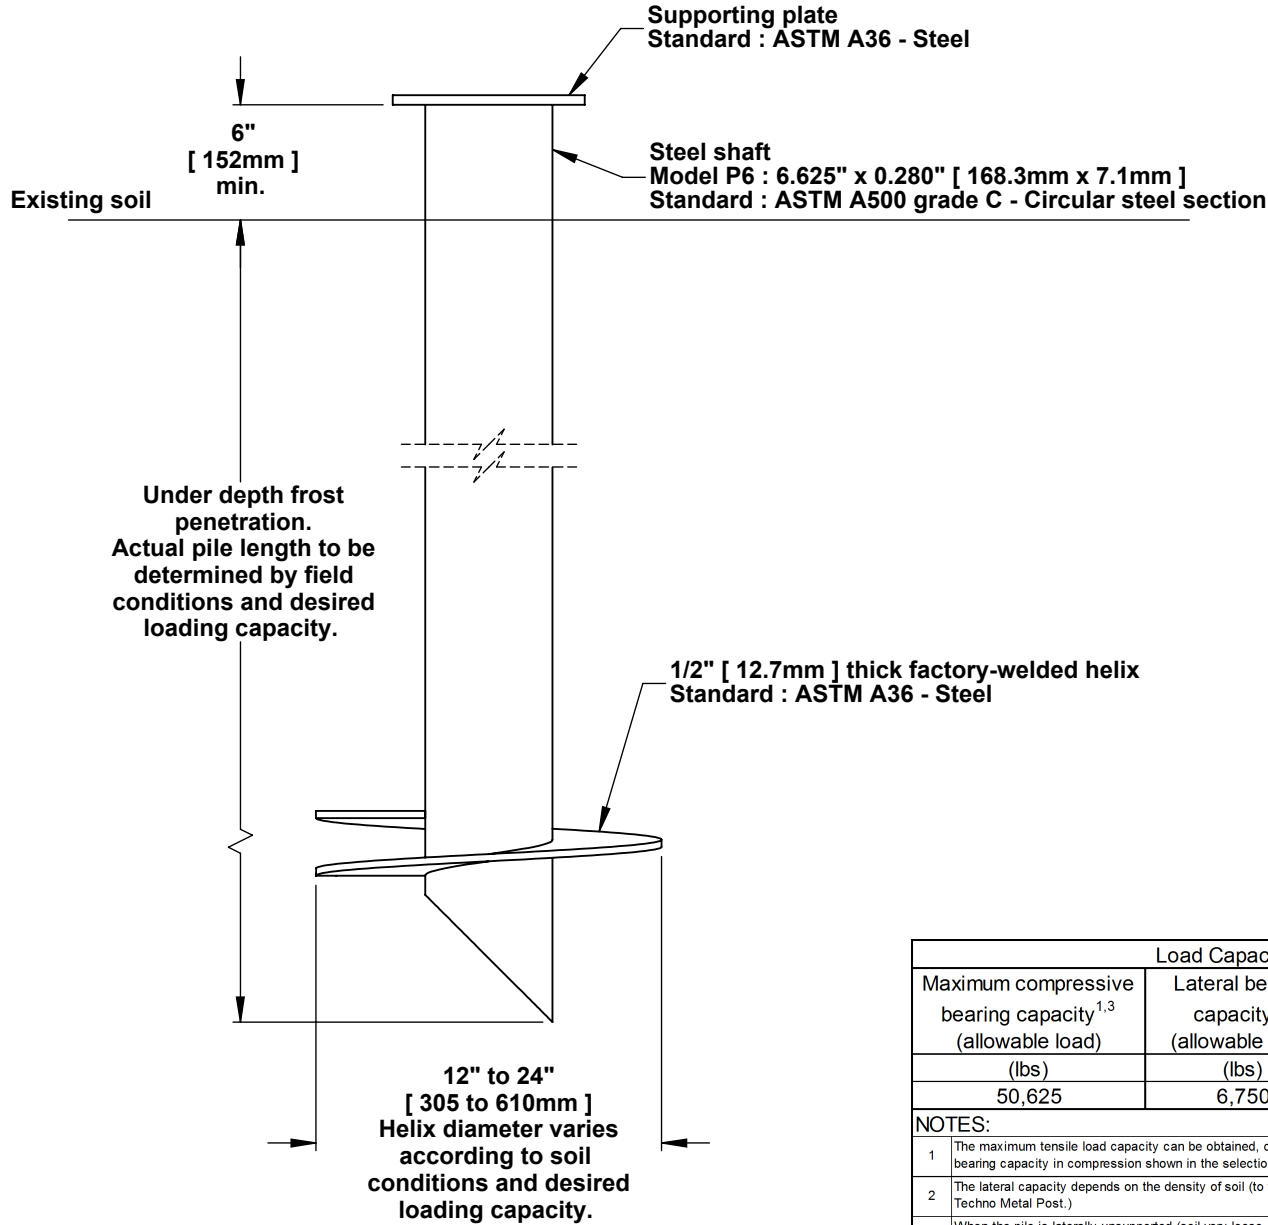

Load Capacity		
Maximum compressive bearing capacity <sup>1,3</sup> (allowable load)	Lateral bearing capacity <sup>2,4</sup> (allowable load)	Factored bending resistance (ultimate load)
(lbs)	(lbs)	(lbs.ft)
50,625	6,750	33,876

- NOTES:**
- The maximum tensile load capacity can be obtained, conservatively, by halving the values of the bearing capacity in compression shown in the selection table.
  - The lateral capacity depends on the density of soil (to validate consult technical department of Techno Metal Post.)
  - When the pile is laterally unsupported (soil very loose / soft, liquefiable soils, water and air), the structural strength of the pile must be approved by the technical department of Techno Metal Post.
  - The values of lateral capacity are average values and can be modified, more or less, depending on the characteristics of the existing soil.
  - If required, piles may be field welded with extensions to achieve greater loading capacities in poor soil conditions.
  - If required, the helical pile and the supporting plate can be galvanized in compliance with standard ASTM A123